



FX-1104 Telephone Dialing System



FEATURES

- **Four (4) Alarm Inputs**
- **Four (4) Dial-Out Numbers**
- **Integrated Keypad For Simplified Programming**
- **Built-in Microphone**
- **Built-in AC Power Failure Sensing**
- **Battery Condition Monitor**
- **Clock**
- **Dial-out To Any Standard Phone, Cell Phone, Pagers and Beepers**
- **Unit Can Be Called From Any Phone To Verify Status of All Monitored Conditions**
- **Connect To Any Standard Phone System**
- **Nonvolatile Memory For All Programmed Parameters**
- **Continues Dialing Numbers In Sequence, Until Acknowledged**

DESCRIPTION

Whether monitoring chlorine levels, pH, DO, pump conditions, toxic gas alarms, and power or just monitoring any status condition, this affordable unit keeps watch around the clock, calling you with reports in voice-synthesized English in the event of a problem. You can also call in to the unit any time for a status report.


Operating on either touch-tone or pulse dialing systems, the FX-1104 Telephone Dialing System makes installation easy. Simply place the unit on any convenient, dry surface and wire the sensors to the unit. An optional NEMA 4X enclosure can be provided in areas where damp conditions exist.

Telephone Dialing System

IDEAL FOR A VARIETY OF APPLICATIONS.

The FX-1104 is useful wherever there is a need for monitoring of temperature, humidity, or other conditions. Sensors and input devices are available to suit a wide range of applications.

- HVAC Equipment
- Computer rooms
- Refrigeration
- Offices
- Boats
- Pump Operations
- Livestock
- Poultry/ Eggs
- Greenhouse
- Homes
- and many others

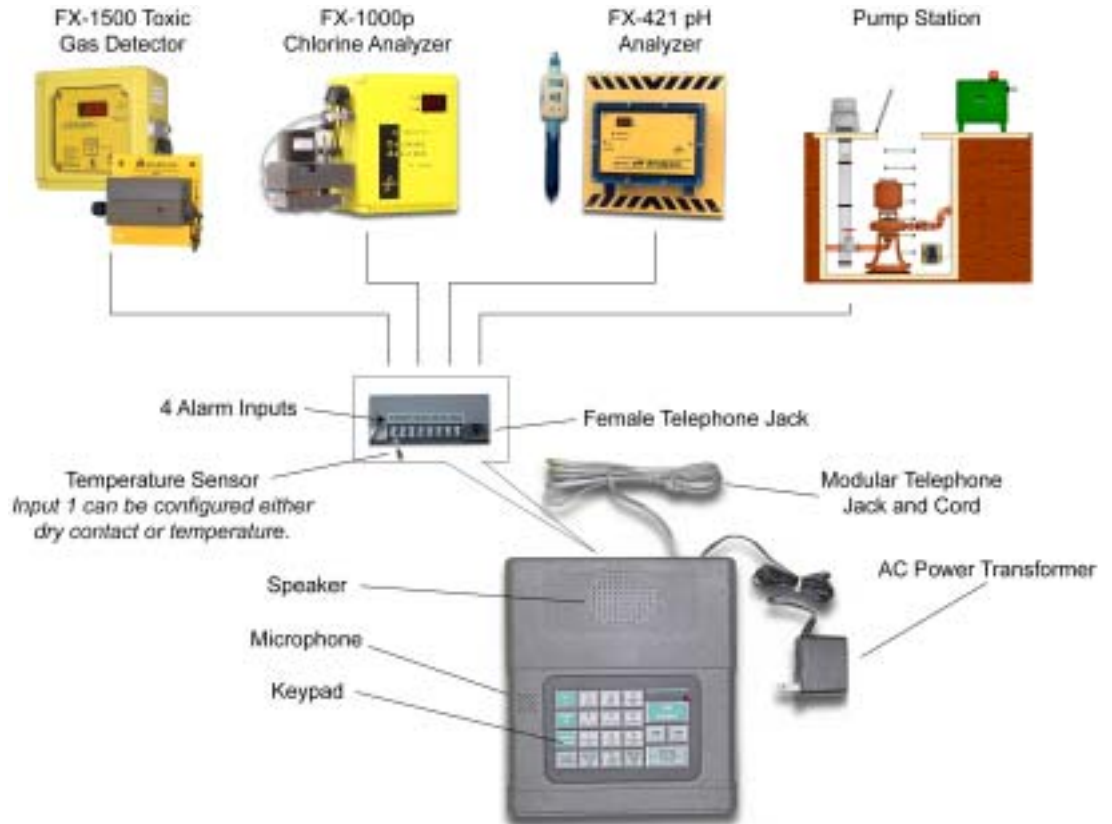

BUILT-IN FEATURES

- 4 User-selectable inputs, temperature or dry-contact
- Microphone monitors high sound alarms and enables remote listen-in
- AC Power failure sensing with variable recognition time
- Battery condition monitor
- Clock

VERSATILE DIAL-OUT CAPABILITIES

- Alert sensors trigger pulse or tone dialout automatically
- Dials up to 4 numbers, up to 32 digits each
- Continues dialing numbers in sequence, until acknowledged
- Call Progress: Intelligently detects ringing or busy signal
- Intelligent dial out to beepers and pagers

SPECIFICATIONS

Size 7.5" W, 2" H, 8.5" D
 Power Requirements _ 120 Vac 60 Hz 15 W
 Batteries (6) 1.5 Vdc "D" cell alkaline (not included)
 Telephone Interface FCC approved RJ-11 plug-in modular connector with 6' cord
 Operating Range Unit should be kept between 32° F and 120° F
 Temperature Sensing Range -20° F to 150° F with remote temperature sensor
 Shipping Weight 4 lbs.



PO Box 39
 2101 Creek Road
 Glen Moore, PA
 19343
 (610) 942-2888
 (800) 874-0590
 fax: (610) 942-2769
 www.foxcroft.com

Distributed By:

Every effort has been made to ensure the accuracy of this document at the time of printing. In accordance with the company's policy of continuous product improvement Foxcroft reserves the right to make product changes without notice. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein.