



# FX-1502 Dual Channel Toxic Gas Leak Detector



## FEATURES

- 2 channel remote electronics/ display unit.
- Sensor can be located as far as 2000 feet from the display unit.
- 2 Alarm levels each channel: Warning and Danger.
- Individual L.E.D. Display of gas concentration in Parts Per Million.
- 105 dB Piezo alarm horn.
- Danger relays and assignable auxiliary relays.
- Local alarm indication and test button at the sensor.
- Optional 4-20mA retransmission output available.

### Gas Type Available

Ammonia  
Carbon Monoxide  
Chlorine  
Chlorine Dioxide  
Hydrogen  
Hydrogen Chloride  
Hydrogen Cyanide  
Hydrogen Sulphide


Nitric Dioxide  
Nitric Oxide  
Oxygen  
Ozone  
Sulphur Dioxide

## DESCRIPTION

The Foxcroft FX-1502 series of toxic gas leak detectors are perfect for monitoring two different gases or two gas container storage, generation or use areas, simultaneously. The remote display unit can be located in a control room or safe area, outside or away from, the potential gas leak. Warning and Danger alarm levels are set to specific points for the gas being monitored. A "cell failure" alarm level indicates if there is a problem with the sensor, or wiring to the sensor. Alarm levels are indicated by L.E.D. on the display, and available for connection to external equipment via configurable relay contact outputs. External equipment can be anything that is activated by a dry relay contact, such as: alarm beacons, horns, auto-dialers, fans, or emergency shutoff valves. An optional 4-20mA retransmission output available for connection to SCADA systems, or chart recorders. Special alarm levels and ranges are available on written request. An optional battery backup/surge protector is also available for applications where AC power is unreliable, or must be maintained in the event of a power failure.

# HIGHLIGHTS

# Model FX-1502 Dual Channel Toxic Gas Leak Detector

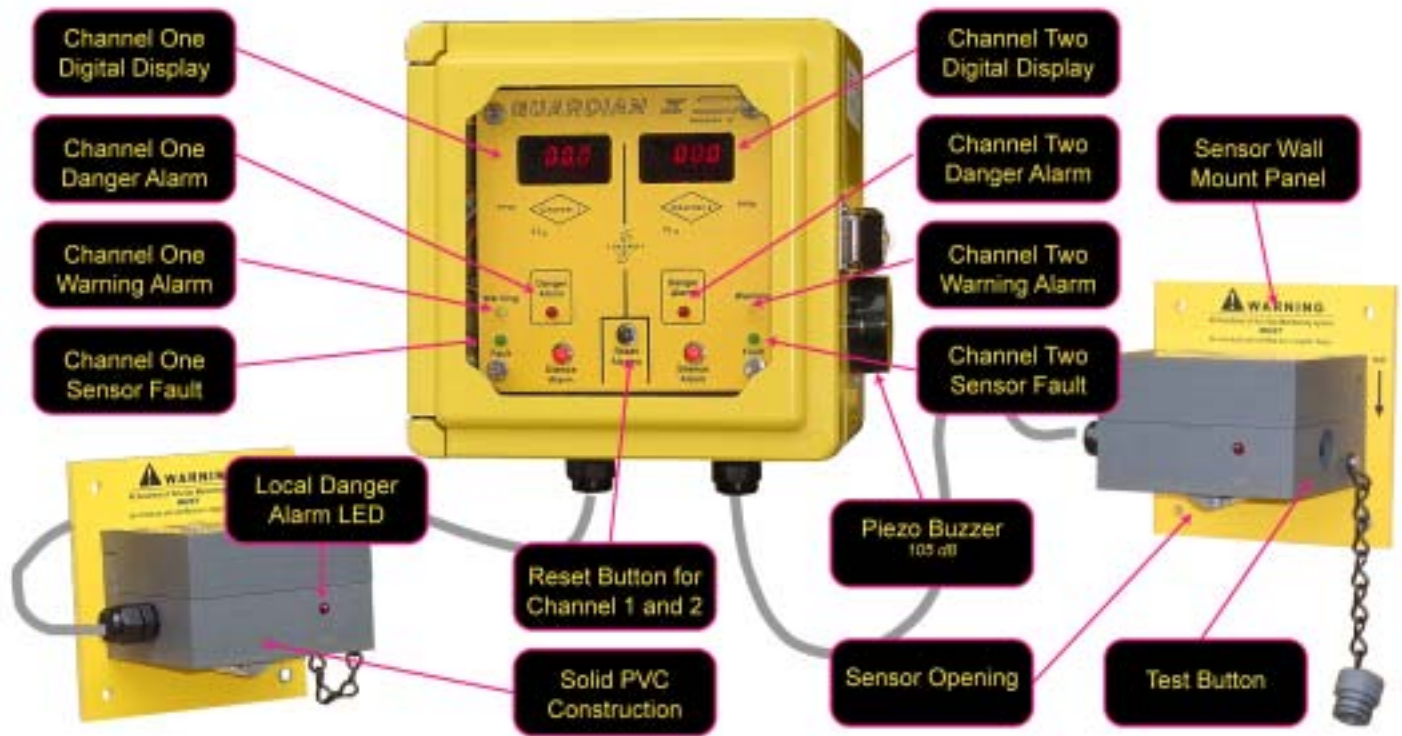

# SPECIFICATIONS

Sensor Input:	Two
Sensor Distance:	25 feet standard cable length, 2000 feet maximum each channel
Measuring Principle:	3 electrode, electrochemical fuel cell
Response Time:	Less than 8 seconds to full alarm
Drift:	Less than 2% per month
Temperature Range:	-15° to 40°C (5° to 104° F)
Humidity Range:	15 - 90 % (non-condensing)
Accuracy:	0.1 PPM (@20 degree C)
Resolution:	0.1 PPM
Sensor Expected Life:	10 years, Oxygen 2 years
Power Supply:	110/ 220 VAC, 50/60 Hz
4-20 mA Output (optional):	two - 4-20mA output @ 300 ohms maximum
Auxiliary Relay (Danger Alarm):	SPDT 10A @ 125 (latching) each channel
Configurable Relays:	Secondary relay provided - SPST 10A @ 125VAC Configuration - Warning Alarm, Danger Alarm, Danger Alarm non-latching for each channel.
Instrument Mounting:	Wall mount
Electronic & Sensor Enclosure:	NEMA 4X
Warranty:	Remote Unit 2 years from date of factory shipment, see individual gas sensor data sheet for sensor warranty.



PO Box 39  
2101 Creek Road  
Glen Moore, PA  
19343  
(610) 942-2888  
(800) 874-0590  
fax: (610) 942-2769  
www.foxcroft.com

Distributed By:

Every effort has been made to ensure the accuracy of this document at the time of printing. In accordance with the company's policy of continuous product improvement Foxcroft reserves the right to make product changes without notice. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein.